
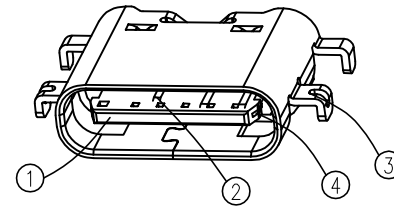
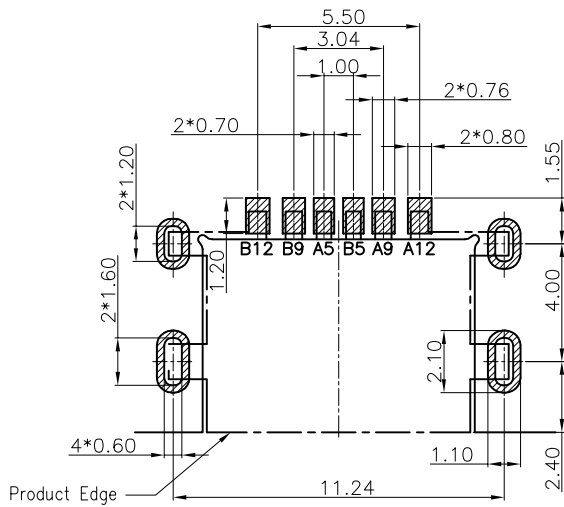


RoHS Compliant 




Goldconn[®]

REV	ECN No.	DATE	REMARK
A	NEW	2020.05.04	NEW RELEASE

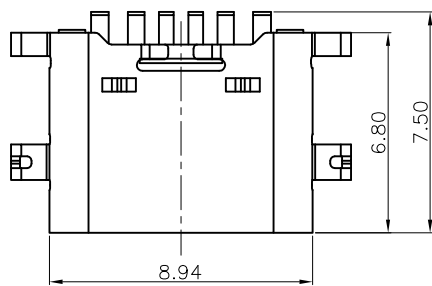


- NOTES:
SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10000 CYCLES
 - PART NUMBER CODE:(产品料号)
CF227-06SL B XX XX-99
(1) (2) (3)

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

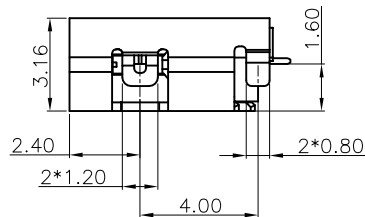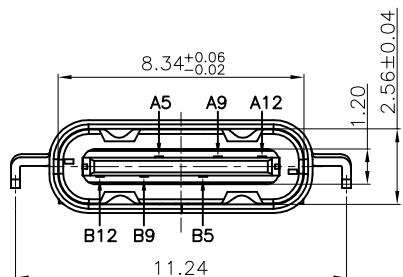

- HOUSING COLOR:
B:BLACK
- CONTACTS PLATED:
11:接触区镀金1u''焊接区域GF
01:接触区镀金1u''焊接区域镀锡50u''
- PACKING OPTIONS
R:TAPE & REEL(常用料)
VR:卷装+真空包装(专用客户指定包规)

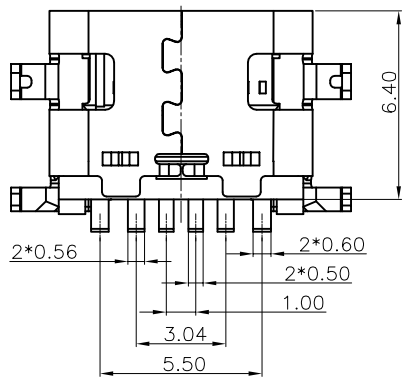

USB TYPE-C PIN ASSIGNMENTS

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	LATCH	STAINLESS STEEL SUS301	----	1SET
3	SHELL	STAINLESS STEEL SUS201	Ni: 50u'' Plated	1SET
2	CONTACT	COPPER ALLOY C2860	接触区镀金, 镍底50U以上, 焊接区见料号	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK UL94V-0	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

PART NO.: SEE THE PART NUMBER CODE		Goldconn Technologies Co., Ltd		DRAWN BY SAM	DATE 2020.05.04
		TITLE TYPE C F 6P沉板1.6四脚插板 CONN		CHECKED BY JAY	DATE 2020.05.04
		DWG.NO. CF227-06-99	SHEET NO. 1 OF 1	APPROVED BY JACKY	DATE 2020.05.04
QUALITY SYMBOL = 0 ∇ = 0		GENERAL TOLERANCES (UNLESS SPECIFIED)		THIRD ANGLE PROJECTION	
		x.xxxx ± ---			
		x.xxx ± 0.10			
		x.xx ± 0.20			
		x.x ± 0.30			
		ANGULAR ± ---			
		DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 1:1	