

RoHS Compliant

REV	ECN No.	DATE	REMARK
A	NEW	2018.11.05	
B	ECN1905012	2019.05.27	整理图纸

NOTES:




SPECIFICATION:

- CURRENT RATING: 3.0A MAX.
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX.
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE: 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES
- WATER PROOFNESS: THIS PRODUCT IS BASED ON SEE THE PART NUMBER






10. PART NUMBER CODE:

CF 121 - 06 L X XX R - X - 99
(1)(2) (3)

- HOUSING COLOR:
B:BLACK
- CONTACTS PLATED:
O1:半金锡1u"
- 防水等级选择:
无:防水等级IP67(打防水胶)
1:防水等级IP46(不打防水胶)

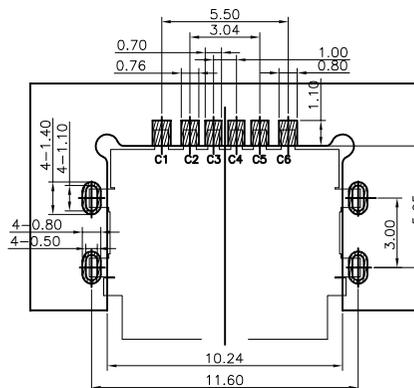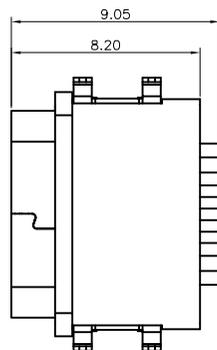

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

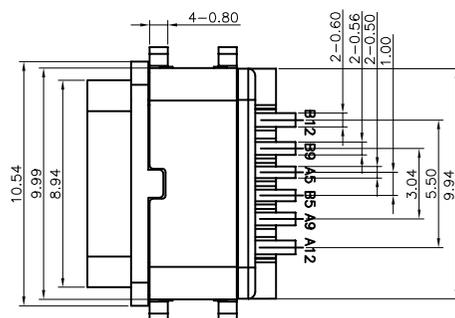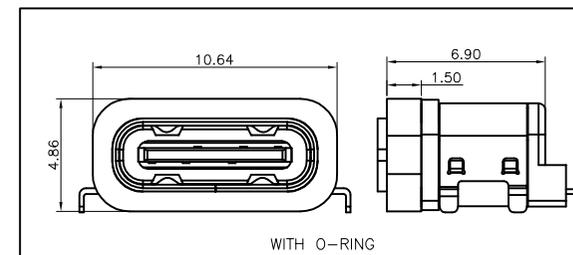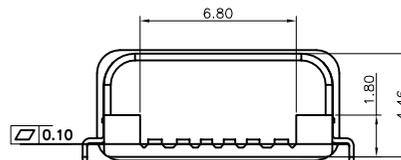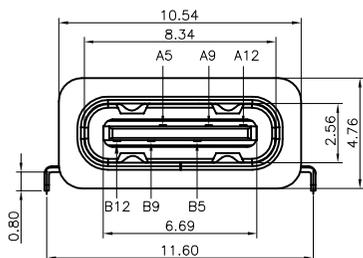

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	O-RING	SILICONE RUBBER	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

PIN ASSIGNMENT:


PIN NO	A1&B12	A4&B9	A5	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

PART NO.: SEE THE PART NUMBER CODE		GOLDCONN TECHNOLOGIES COMPANY LIMITED		DRAWN BY SAM	DATE 2015.05.10
GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE TYPE C F 单排6P沉板式四脚插板防水型		CHECKED BY JAY	DATE 2015.05.10
QUALITY SYMBOL	x.xxxx	±	---	APPROVED BY JACKY	DATE 2015.05.10
	x.xxx	±	0.10		
	x.xx	±	0.25		
	x.x	±	0.30		
	ANGULAR	±	---		
DWG.NO.	CF121-06-99	SHEET NO.	1 OF 1		
DIMENSION STYLE	MM ONLY	DESIGN UNITS	METRIC		
SCALE	1:1	THIRD ANGLE PROJECTION			



RoHS Compliant

REV	ECN No.	DATE	REMARK
A	NEW	2018.11.05	
B	ECN1905012	2019.05.27	整理图纸

6P防水型四脚




6P防水型两脚




小标签

保护带



每袋1000PCS



① 产品入载带示意图




② 卷盘贴标签示意图

③ 10盘产品叠层示意图


防水圈袋装示意图

防水圈

每整箱配7包
不足整箱按连接器数量

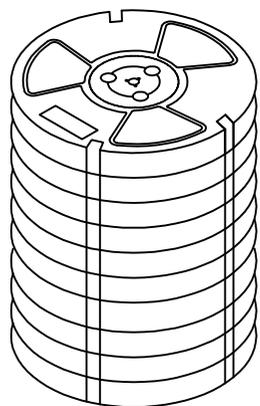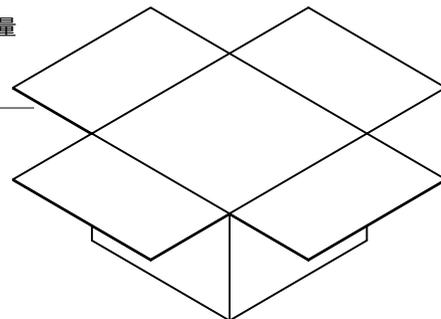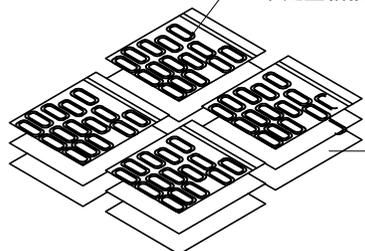

外箱⑥



外标签⑦

④ 产品入外箱示意图

⑤ 外箱封箱示意图

NOTE:

1. QUANTITY/REEL: 800 PCS

數量/卷: 800 PCS

QUANTITY/INNER CARTON: 800 X 10 = 8000 PCS

數量/箱: 800 X 10 = 8000 PCS

2. FREE 20 CAVE IN THE FRONT CARRIER AND FREE 20 CAVE IN THE END CARRIER.

包裝帶內圈空20格, 外圈空20格.

ITEM	DESC.	MATERIAL	REMARKS	QTY
1	成品		C F6P防水型沉板母座成品	8000
2	CARRIER TAPE	PET	W=24mm T=0.35mm	——
3	COVER TAPE	PET	W=13.3mm T=0.05mm	——
4	小标签		L102mm*W59mm	10
5	卷盘	PS	ø330MM*W28.5MM	10
6	外标签		L102mm*W102mm	1
7	外箱	A=A	L330mm*W330mm*320mm	1

PART NO.: SEE THE PART NUMBER CODE		GOLDCONN TECHNOLOGIES COMPANY LIMITED		DRAWN BY SAM	DATE 2015.05.10
GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE TYPE C F 单排6P沉板式四脚插板防水型		CHECKED BY JAY	DATE 2015.05.10
QUALITY SYMBOL	x.xxxx	±	---	APPROVED BY JACKY	DATE 2015.05.10
	x.xxx	±	0.10		
	x.xx	±	0.25		
	x.x	±	0.30		
	ANGULAR	±	---		
DWG. NO. CF121-06-99		SHEET NO. 2 OF 2			
DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC		SCALE 1:1	
				THIRD ANGLE PROJECTION	