RoHS Compliant (Pb)

REV	ECN No.	DATE	REMARK
A	NEW	2018.11.05	
B	ECN1905012	2019.05.27	整理图纸

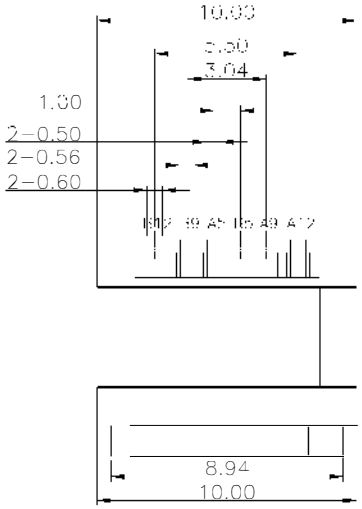

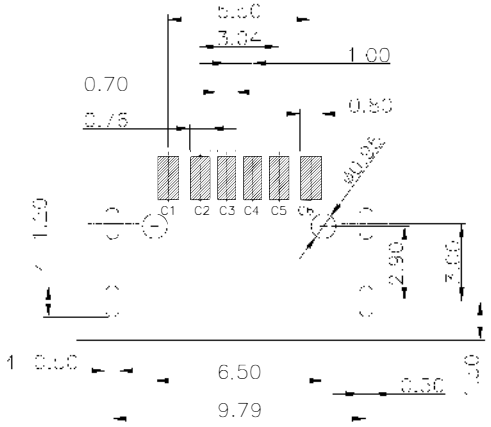

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.
10. PART NUMBER CODE:(产品料号)

CF158 - 06 L X XX R - 99

—— HOUSING COLOR
B:BLACK
CONTACTS PLATED:
01:半金锡1u"

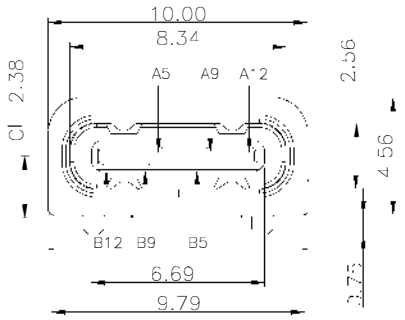



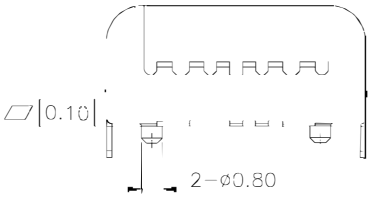

加防水圈示意图

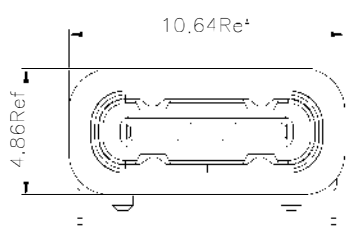







NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	防水圈	硅胶	BLACK	1PCS
4	SHELL	STAINLESS STEEL	Ni Plated	1PCS
3	SHIFTING PLATE	STAINLESS STEEL	Ni Plated	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	A5	A9&B4	A12&B
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

PART NO. PART NUMBER CODE

QUALITY SYMBOL: A / B / C

GENERAL TOLERANCES (UNLESS SPECIFIED)

X.XXXX	± ---
X.XXX	± 0.10
X.XX	± 0.25
X.X	± 0.30
ANGULAR	± °

GOLDCONN TECHNOLOGIES COMPANY LIMITED

DRAWN BY	SAM
DATE	2018.11.05
CHECKED BY	JAY
DATE	2018.11.05
APPROVED BY	JACKY
DATE	2018.11.05

TITLE: TYPE C F 单排6P板上四脚插板防水型

DWG.NO. CF158-06-99

SHEET NO. 1 OF 1

DIMENSION STYLE: MM ONLY | DESIGN UNITS: METRIC | SCALE: 11

THIRD ANGLE PROJECTION

frame size A4