RoHS Compliant

REV	ECN No.	DATE	REMARK
A0	NEW	2015.05.10	NEW RELEASE

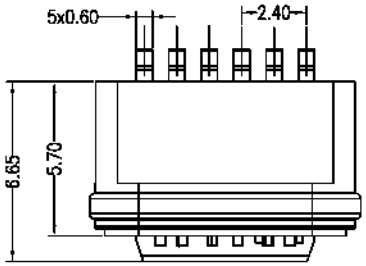

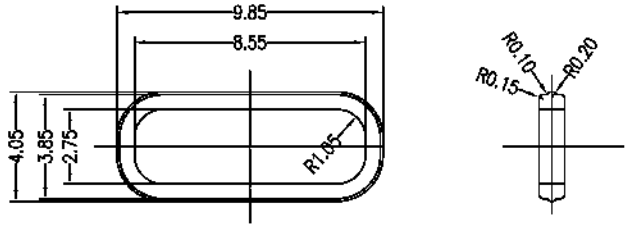

防水圈尺寸图

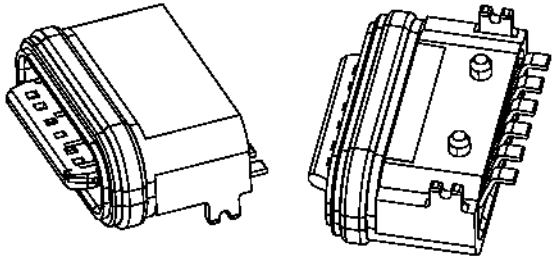









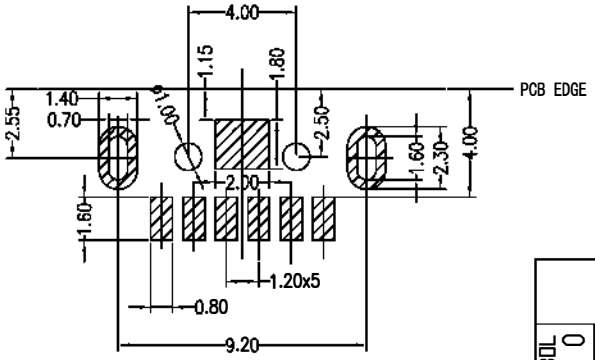

PCB LAYOUT 图仅供参考

Note:

1.Material:
- 1.1 Housing: PA9T
- 1.2 Contact:C7025,t=0.20mm
- 1.3 Shell: Kirsite

2.ELECTRICAL:
- 2-1:CURUENT RATAING: 3A
- 2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS
- 2-3:DIEELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;

3:MECHANICAL CHARACTERISTICS:
- 3-1:MATING FORCE:5~20N
- 3-2:UNMATING FORCE:8~20N(INITIAL), 6~20N(AFTER 10000 CYCLES)
- 3-3:FREQUENCE: 200±50 CYCLES /HOUR,10000 CYCLES
- 3-4:OPERATING TEMPERATURE ;-40°~80°.

4: WATERPROOF: IP-X7.

5. PART NUMBER CODE:

CF196-06 S C B XX R - 22

① ②

① HOUSING: B:BLACK

② CONTACTS PLATED: 01:半金锡1u"

TABLE:

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

GENERAL TOLERANCES (UNLESS SPECIFIED)	
x.xxxx	± ---
x.xxx	± 0.10
x.xx	± 0.25
x.x	± 0.30
ANGULAR	± --°

QUALITY SYMBOL: ▶ = 0 ▷ = 0

GOLDCONN TECHNOLOGIES COMPANY LIMITED

TITLE: TYPE C 6PIN SMT 防水型

DWG.NO.: CF196-06-22

SHEET NO.: 1 OF 1

DIMENSION STYLE: MM ONLY

DESIGN UNITS: METRIC

SCALE: 1:1

	DATE
	2015.05.10
CHECKED BY JAY	DATE 2015.05.10
APPROVED BY JACKY	DATE 2015.05.10

THIRD ANGLE PROJECTION

frame size: A4